
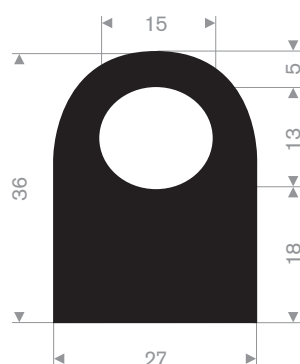


luke profiler

hardness 45° Shore
 tolerances ISO 3302 E2
 quality EPDM
 colour black

A	B	C	artikkel nr.	rull lengde (m)
25	15	6	215.82.515	40
25	25	10	215.82.525	20
30	20	8	215.83.020	20
30	25	10	215.83.025	20
30	30	14	215.83.030	15
35	15	6	215.83.515	25
35	20	8	215.83.520	20
35	30	14	215.83.530	15
35	35	14	215.83.535	15
40	15	6	215.84.015	20
40	20	8	215.84.020	20
40	25	10	215.84.025	15
40	30	14	215.84.030	15
40	40	18	215.84.040	15
45	20	8	215.84.520	15
50	20	8	215.85.020	15
50	30	14	215.85.030	10
50	40	18	215.85.040	10
50	50	20	215.85.050	10
60	40	18	215.86.040	10
70	40	18	215.87.040	5

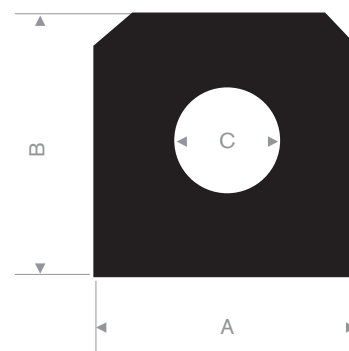

215.28.736
 EPDM 40° Shore sort
 rull lengde 20 meter


luke pakning

toleranser ISO 3302 E3

kvalitet solid rubber skin / sponge rubber inside

farge sort

A	B	artikkel nr.	rull lengde (m)
57	32	215.95.732	10
70	40	215.97.040	10
71	32	215.97.132	10
94	50	215.99.450	10

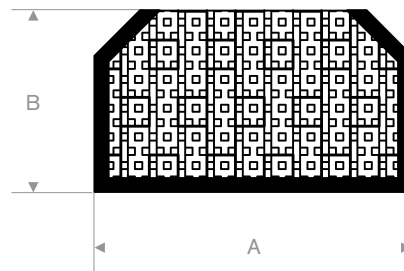

rektangulær pakning

hardhet 45° Shore
toleranser ISO 3302 E2
kvalitet EPDM
farge sort

A	B	artikkel nr.	rull lengde (m)
5	5	218.00.505	200
6	3	218.00.603 NBR	100
6	6	218.00.606	200
8	8	218.00.808	100
10	10	218.01.010	100
12	10	218.01.210	50
12	12	218.01.212	50
15	10	218.01.510	50
15	15	218.01.515	50
18	18	218.01.818 NBR	50
20	12	218.02.012	50
20	20	218.02.020	50
25	20	218.02.520	25
25	25	218.02.525	25
30	2.75	218.03.002 CR	25
30	15	218.03.015	25
100	5	218.10.005 CR	50



Viton rektangulær pakning

hardhet 75° Shore
toleranser ISO 3302 E2
temperatur -40°C / +220°C
kvalitet Viton
farge sort

A	B	artikkel .nr
9	9	218.60.909
10	10	218.61.010
10	7	218.61.007
11	11	218.61.111
15	9	218.61.509
21	8	218.62.108

